



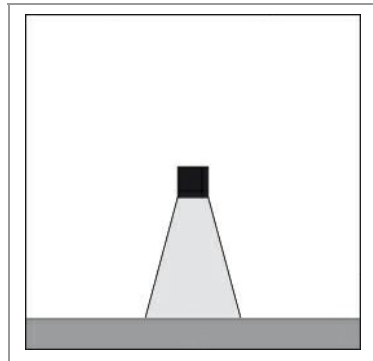

ATIA 1 LIGHT 28° BEAM OUTDOOR WALL

CONSTRUCTIVE & DIMENSIONAL:

Application field:	Facade, Columns, Walls, Covered entrances & walkways, Porch, balconies & terraces
Construction material:	Extruded aluminum EN AW-6063 T5 / die-casting aluminum EN-AB 44100
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Length :	273mm(10,74")
Width :	167mm(6,57")
Height:	400mm(15,74")

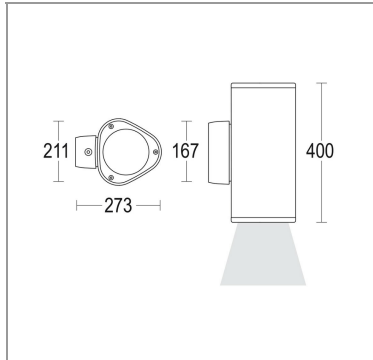

GH1952.CGMT300EN
1952.CGM.T

GH1952.CGMT400EN
1952.CHM.T

H(m)	φ(m)	Lux Medi
5	2.5	122
4	2.0	191
3	1.5	339
2	1.0	764
1	0.5	3055

H(m)	φ(m)	Lux Medi
5	2.5	124
4	2.0	194
3	1.5	345
2	1.0	775
1	0.5	3102

GH1952.ECMT300EN
1952.CDM.T

GH1952.ECMT400EN
1952.CEM.T

H(m)	φ(m)	Lux Medi
5	2.5	176
4	2.0	275
3	1.5	489
2	1.0	1099
1	0.5	4398

H(m)	φ(m)	Lux Medi
5	2.5	179
4	2.0	279
3	1.5	496
2	1.0	1116
1	0.5	4465

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1952.CGMT300EN 1952.CGM.T

Description:	1 x 26 W LED 3000 K CRI>90 2967 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Metal cable gland M16 Ø 5/10 mm
Emergency kit:	Not available
Light source:	LED
Power:	26W
LED voltage range:	31.2-36.8V
Current:	700 mA
ZVEI - Led Type:	COB
Color temperature:	3000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	2967 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1952.CGMT400EN 1952.CHM.T

Description:	1 x 26 W LED 4000 K CRI>90 3012 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Metal cable gland M16 Ø 5/10 mm
Emergency kit:	Not available
Light source:	LED
Power:	26W
LED voltage range:	31.2-36.8V
Current:	700 mA
ZVEI - Led Type:	COB
Color temperature:	4000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	3012 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C



NOTE*:

Next models are dimmable upon request: GH1952.CGMT300EN 1952.CGM.T
and
GH1952.CGMT400EN 1952.CHM.T





ATIA 1 LIGHT 28° BEAM OUTDOOR WALL

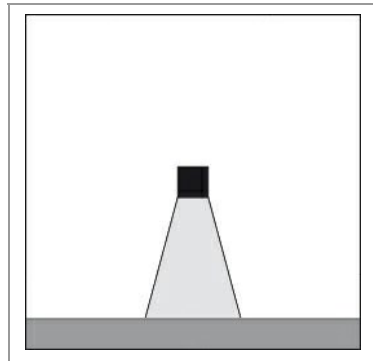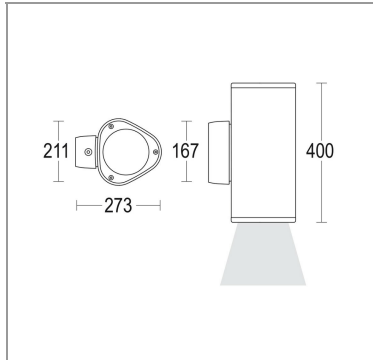

GH1952.CGMT300EN
1952.CGM.T

GH1952.CGMT400EN
1952.CHM.T

H(m)	φ(m)	Lux Medi
5	2.5	122
4	2.0	191
3	1.5	339
2	1.0	764
1	0.5	3055

H(m)	φ(m)	Lux Medi
5	2.5	124
4	2.0	194
3	1.5	345
2	1.0	775
1	0.5	3102

GH1952.ECMT300EN
1952.CDM.T

GH1952.ECMT400EN
1952.CEM.T

H(m)	φ(m)	Lux Medi
5	2.5	176
4	2.0	275
3	1.5	489
2	1.0	1099
1	0.5	4398

H(m)	φ(m)	Lux Medi
5	2.5	179
4	2.0	279
3	1.5	496
2	1.0	1116
1	0.5	4465

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1952.ECMT300EN 1952.CDM.T

Description:	1 x 39 W LED 3000 K CRI>90 4271 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Metal cable gland M16 Ø 5/10 mm
Emergency kit:	Not available
Light source:	LED
Power:	39W
LED voltage range:	31.2-36.8V
Courrent:	1050 mA
ZVEI - Led Type:	COB
Color temperature:	3000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	4271 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1952.ECMT400EN 1952.CEM.T

Description:	1 x 39 W LED 4000 K CRI>90 4336 lm
Operating Power:	110-277 V / 50-60 Hz
Number of heads:	1
Number of circuits:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Metal cable gland M16 Ø 5/10 mm
Emergency kit:	Not available
Light source:	LED
Power:	39W
LED voltage range:	31.2-36.8V
Courrent:	900 mA
ZVEI - Led Type:	COB
Color temperature:	4000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	4336 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

OPTICAL:

Beam Type:	Wall-Effect 1 [21°-40°] medium
Beam angle:	28°
Light distribution:	Symmetric
Beam directionability:	Swivelling
Swivel [°]:	+/- 10°
Diffuser material:	Soda-lime tempered glass 10mm
Diffuser finish:	Clear
Reflector material:	Aluminium with super pure aluminum high vacuum deposit 99.5%
Reflector finish:	Aluminum

FINISH CODE:

.01 White (matt)	.05 Dark grey (matt)	.19 Light Grey
.45 Corten	.80 Sand	

ACCESSORIES:



Elipsoidal lens
Atia
AC313

